

V-Band Reflective FET Switch

50-75 GHz/SP8T/ WR-15

Model: TMSP8T-050075-15

The TMSP8T-050075-15 is a V-Band switch with a TTL driver that operates between 50 and 75 GHz. The SP8T switch offers 75 dB port-to-port isolation with a typical switching speed of 100 nanoseconds. The input and output connectors of the switch are WR-15.

Features:

- Frequency range: 50-75GHz
- Low Insertion Loss: 13 dB
- Power Handling : 20 dBm
- High Isolation
- Switch Type: Reflective

Applications:

- Communication Systems
- Automatic Test Equipment
- Switching Network

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range		50-75		GHz
插损 Insertion Loss		13		dB
隔离 Isolation		75		dB
切换速度 Switch Speed		100		ns
输入驻波 Input VSWR		1.8		:1
输出驻波 Output VSWR		1.8		:1
功率压缩 P1dB Output P1dB		20		dBm
直流电压 DC Voltage		+5		V DC
控制电压 Control Voltage TTL	"0"=Low;"1"=High			V
直流电流 DC Supply Current		-800		mA
开关类型 Switch type	Reflective			

绝对最大值 Absolute Maximum Ratings :





描述 Description	参数 Parameter	单位 Units
供电偏置电压 Supply Bias Voltage	-5 (+5%)	V
射频输入功率 RF Input Power	27	dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V	

机械特性 Mechanical Specifications:

描述 Description	参数 Parameter	单位 Units
输入/输出接口 Input /Output Connector	WR-15/UG-385/U	
直流控制接口 Control Bias	J30J-9ZKP	
尺寸 Size	184*43*23	mm

外形图 Outline Drawing:

Unit:mm

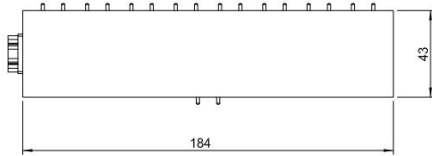

真值表 Truth Table

TTL Control Input							Signal Path State
Bit 1	Bit 2	Bit 3	Bit 4	Bit 5	Bit 6	Bit 7	
0	0	0	0	0	0	0	J0-J1
1	0	0	0	0	0	0	J0-J2
0	1	0	0	0	0	0	J0-J3
0	0	1	0	0	0	0	J0-J4
0	0	0	1	0	0	0	J0-J5
0	0	0	0	1	0	0	J0-J6
0	0	0	0	0	1	0	J0-J7
0	0	0	0	0	0	1	J0-J8

TTL Control Voltages &VDD

Stage	Bias Condition
VDD	+5V ($\pm 5\%$)
Low (0)	0 to 0.8Vdc
High (1)	+3.3 Vdc



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TMSP8T-050075-15	V-Band Reflective FET Switch 50-75 GHz,SP8T,WR-15	Rev.1.1