

Power Amplifier

1-18GHz/30dB Gain/31 dBm Psat

Model: TLPA1G18G-30-30

TLPA1G18G-30-30 is a power amplifier with a small signal gain of 30 dB and a nominal Psat of 31 dBm across the frequency range of 1 to 18 GHz. The DC power requirement for the amplifier is +18 VDC/1 A. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Ultra Wide Band: 1-18 GHz
- Gain: 30dB Min
- Output Power Psat: 31dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	1-18			GHz
Small Signal Gain	30			dB
Gain Flatness		±2	±2.5	dB
Output P1dB	30			dBm
Output Psat		31		dBm
Noise Figure			5	dB
Spurious		-60		dBc
Input VSWR		2	2.2	:1
Output VSWR		2	2.2	:1
DC Voltage		18	20	V DC
DC Supply Current		1		A
Impedance	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	58.5*38*12	mm
Weight	50	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+20 V
RF Input Power	+6 dBm
ESD sensitivity (HBM)	Class 0, passed 150V

Outline Drawing:

Unit:mm

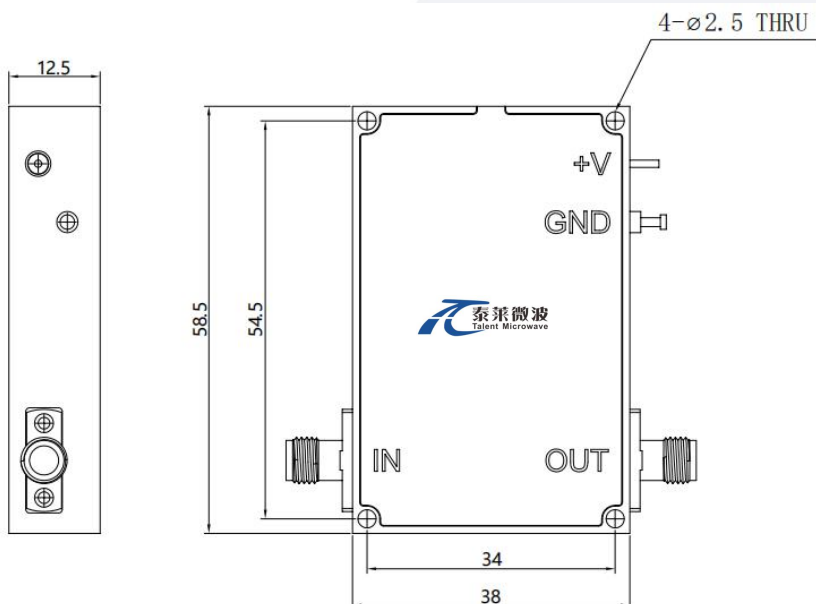

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+60	°C
Non-operating Temperature*	-50		+70	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:


Base Number	Description	Revision
TLPA1G18G-30-30	Power amplifier 1-18GHz,Gain:30dB,Psat:31dBm, +18V DC,Without Heatsink	Rev.1.1
TLPA1G18G-30-30-HS	Power amplifier 1-18GHz,Gain:30dB,Psat:31dBm, +18V DC,With Heatsink	Rev.1.1

Typical Performance Data:

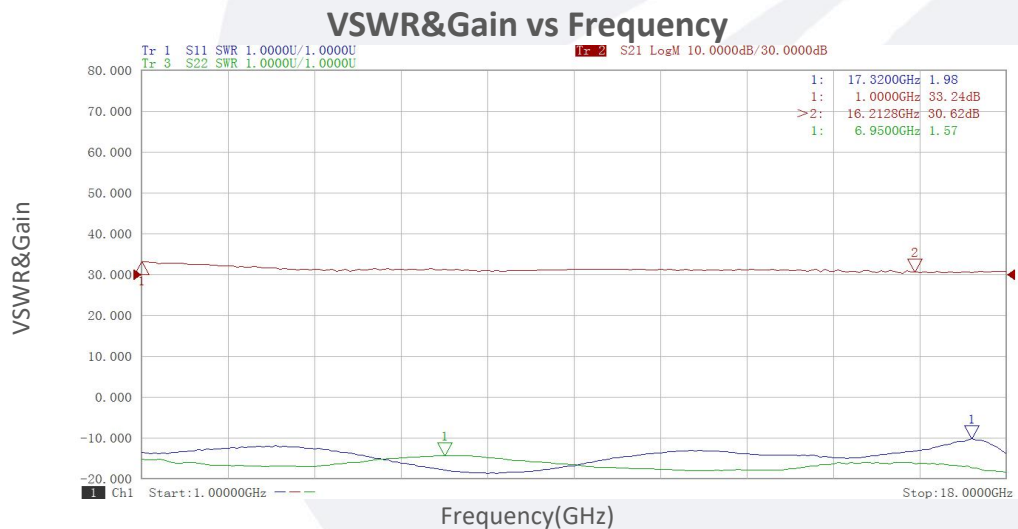

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

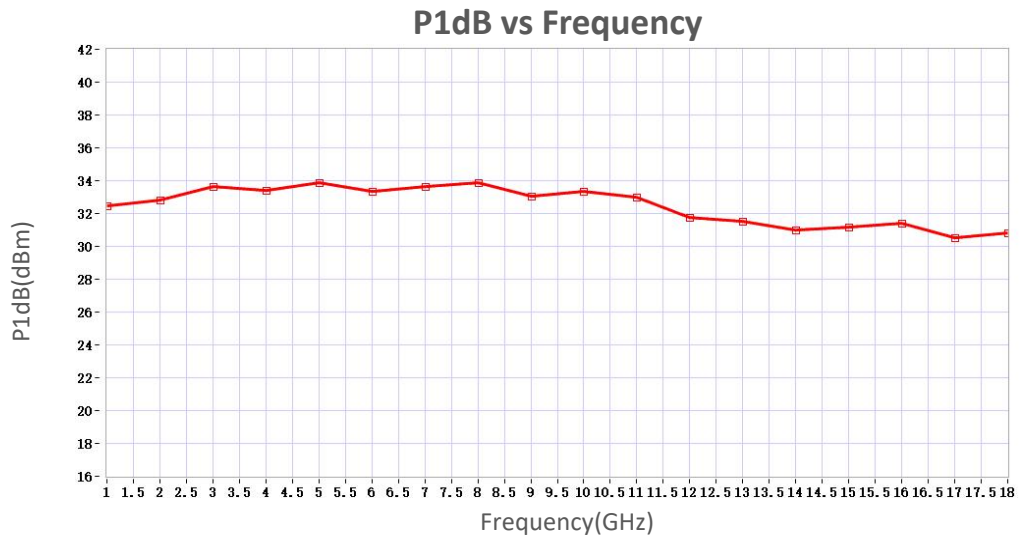

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.