

Low Noise Amplifier

5-11GHz/2.5dB NF/19dB Gain/16dBm P1dB

Model: TLLA5G11G-19-30

TLLA5G11G-19-30 is a low noise amplifier with a typical small signal gain of 19 dB and a nominal noise figure of 2.5 dB across the frequency range of 5 to 11 GHz. The DC power requirement for the amplifier is +8 V DC/80 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 5-11GHz
- Gain: 19dB Typ
- Noise Figure: 2.5dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	5		11	GHz
Small Signal Gain		19		dB
Gain Flatness		±1.5		dB
Noise Figure		2.5		dB
Output P1dB		16		dBm
Input VSWR		1.7		:1
Output VSWR		1.5		:1
DC Voltage		+8	+12	V DC
DC Supply Current		80		mA
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	20*30*8	mm


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+12 V
RF Input Power	TBD
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

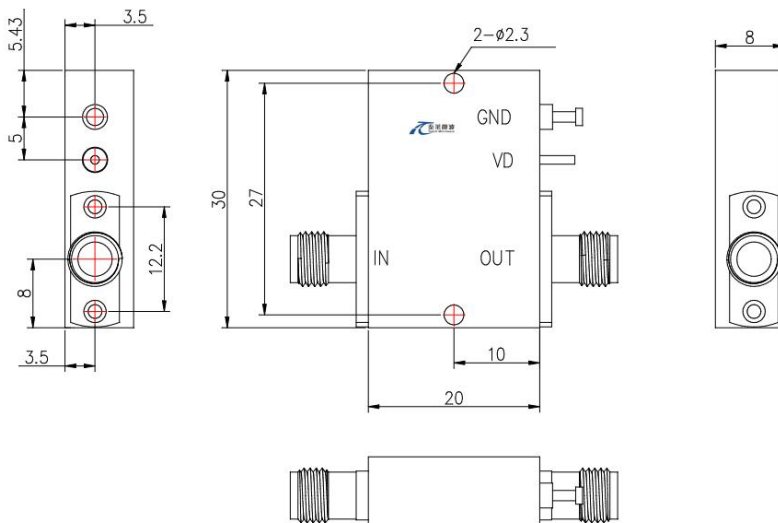

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-40		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:


Base Number	Description	Revision
TLLA5G11G-19-30	Low Noise Amplifier, 5-11GHz, Noise Figure:2.5dB, Gain:19dB,P1dB:16dBm,+8V DC,Without Heatsink	Rev.1.1
TLLA5G11G-19-30-HS	Low Noise Amplifier, 5-11GHz, Noise Figure:2.5dB, Gain:19dB,P1dB:16dBm,+8V DC,With Heatsink	Rev.1.1

Typical Performance Data:

Gain&VSWR vs Frequency

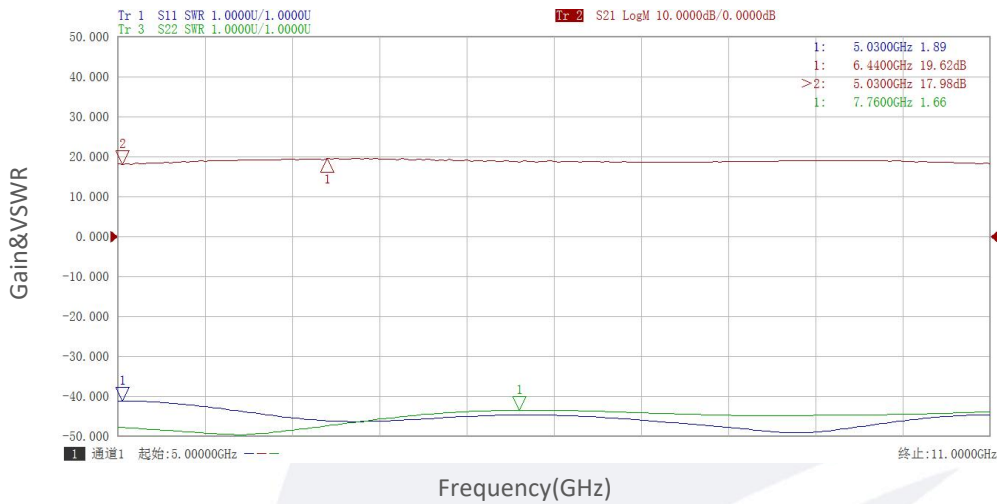


Noise Figure vs Frequency

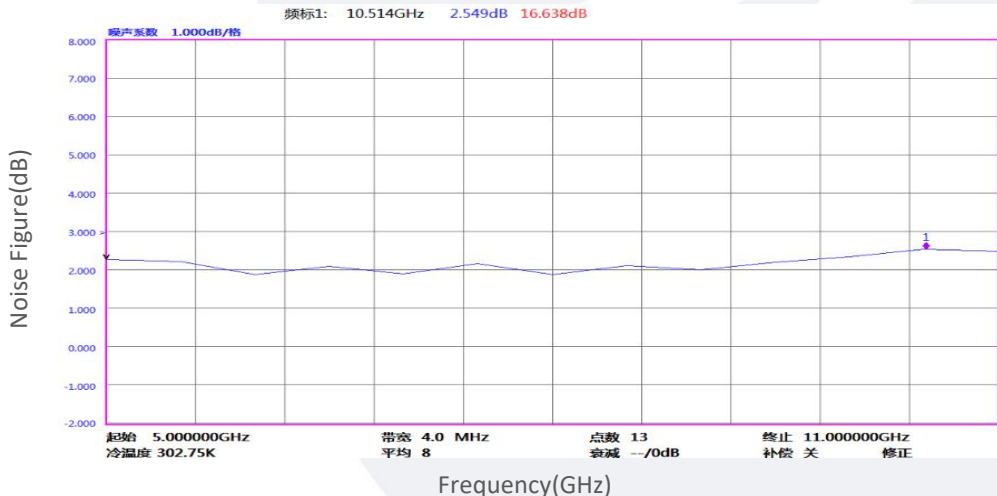

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

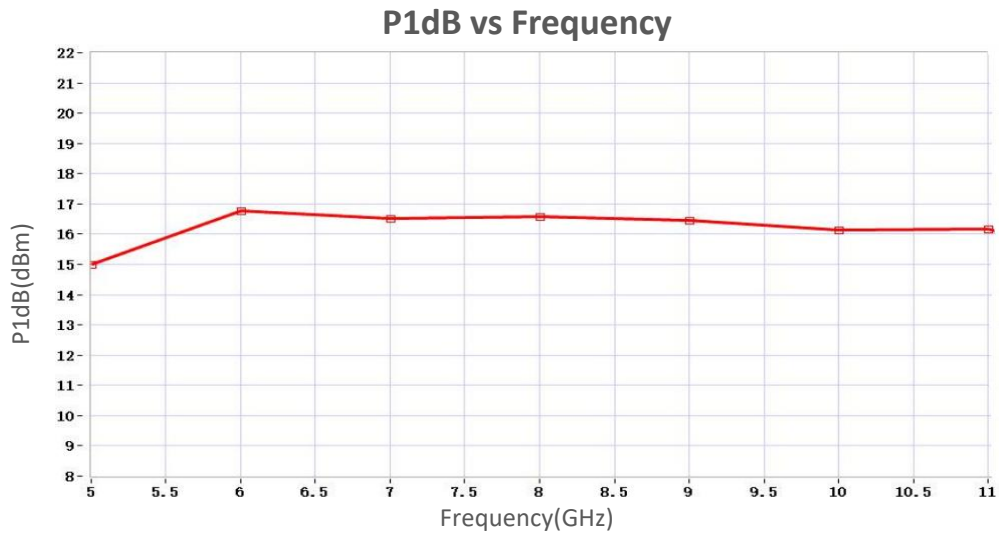

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.